


# Hebelzug

## PREMIUM LINE



Artikel. Nr.	Tragfähigkeit kg	Kettenstränge	Kleinstes Hakenmaß mm	Lastkette mm	Hebelkraft daN	Gewicht bei standart Hubhöhe kg	Gewicht je m Mehrhub kg
HZT-53/07-250	250	1	205	3,2x9,0	20	1,60	0,20
HZT-53/07-500	500	1	246	4,2x12,2	24	2,60	0,40
HZT-53/07-800	800	1	280	5,6x15,8	29	5,70	0,70
HZT-53/07-1600	1600	1	335	7,1x20,1	36	8,00	1,10
HZT-53/07-2500	2500	1	375	9,0x24,8	34	11,20	1,70
HZT-53/07-3200	3200	1	395	10x28,1	37	15,00	2,30
HZT-53/07-6300	6300	2	540	10x28,1	38	26,00	4,70
HZT-53/07-9000	9000	3	680	10x28,1	39	40,00	7,00

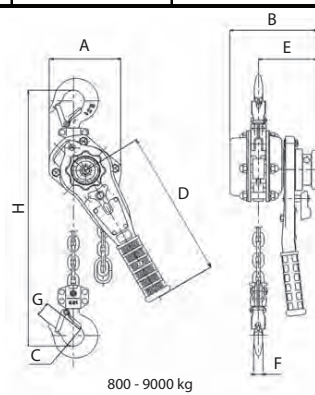

(Nach EN-12195-3 auch zum Zurren geeignet)

Tragfähigkeit kg	Hauptabmessungen in mm							
	A	B	C	D	E	F	G	H
250	68	87	32	140	55,5	11	21	200
500	81	100,5	34,5	180	62,5	12	24,5	250
800	119	144	36	245	97	14	24	280
1600	126	159	43	265	100	19	32	335
2500	150	173	47	265	102	21	37	375
3200	159	190	50	415	112	24,5	39	395
6300	217	190	60	415	112	34	50	540
9000	304	190	85	415	112	42	73	680

Änderungen vorbehalten.